


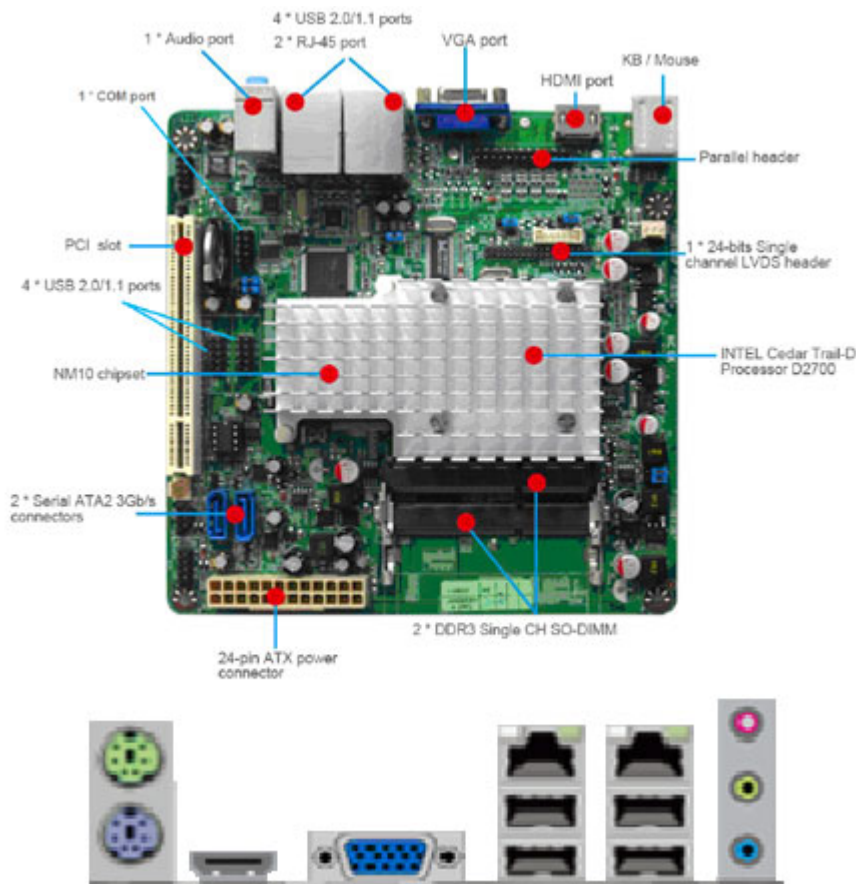

99.95 EUR  
incl. 19% VAT, plus [shipping](#)

- Dual-Core !
- Intel Atom !
- FANLESS !
- Replace NC9KDL-2700 !

Support: [Specifications \[EN\]](#)

- INTEL® Cedar Trail-D Processor D25500 + NM10 Chipset
- Support 2 \* DDR3 800/1067MHz Single CH up to 4GB
- Support DirectX 9 Graphics
- Support 2 \* Serial ATAII (3Gb/s) Devices
- Integrated Realtek ALC662 HD Audio CODEC with 6-CH
- 1 \* 24 bits Single Channel LVDS header
- Supports 2 \* Realtek RT8111EVL Gigabit LAN
- Support Watch dog Technology
- Support CPU Smart FAN
- Compliance with ErP standard
- Mini-ITX Form Factor (170mm x 170mm)

|                  |                                                 |
|------------------|-------------------------------------------------|
| CPU              | INTEL ® Cedar Trail-D Processor D2550 (1.86GHz) |
| Chipset          | INTEL® NM10 Express Chipset                     |
| Memory           | 2 * SO-DDR3 RAM (up to 4 GB)                    |
| Expansion Slots  | 1 * PCI slot                                    |
| Storage          | 2 * Serial ATA2 3Gb/s connectors                |
| Audio            | 1 * Floppy connector                            |
| Ethernet LAN     | Realtek ALC662 6-Channel HD Audio               |
| USB              | 2x Realtek RTL8111EVL Gigabit LAN               |
| Special Features | Embedded 8 * USB 2.0/1.1                        |
|                  | - Intel Atom Processor D2700                    |
|                  | - Support ACPI S3                               |
|                  | - Support CPU Smart Fan                         |
|                  | - Support Watch Dog Technology                  |

**Rear Panel I / O**

- 4 \* USB 2.0/1.1 ports
- 1 \* PS/2 Mouse & 1 \* Keyboard connector
- 2\* RJ-45 port
- 3 \* Audio I/O ports ( Line-in, mic and line-out )
- 1 \* VGA port
- 1 \* HDMI

**Internal I / O**

- 2 \* USB 2.0/1.1 headers for 4 USB 2.0 ports
- 3 \* NB / Chassis Fan connectors;
- 1 \* 24-pin ATX Power connector
- 1 \* LVDS header, 1 \* Inverter header
- 1 \* Parallel
- 1 \* AUDIO header
- 1\* RS232 header

**BIOS**

Award 16MB DIPFlash ROM

**Form Factor**

Mini ITX Form Factor(17cmx17cm)

**Scope of supply**

- Jetway NC9KDL-2700 Mini-ITX Mainboard
- DriverCD
- Manual
- 2x SATA cable
- 1x COM Header cable
- ATX I/O Shield