




999.00 EUR
incl. 19% VAT, plus [shipping](#)

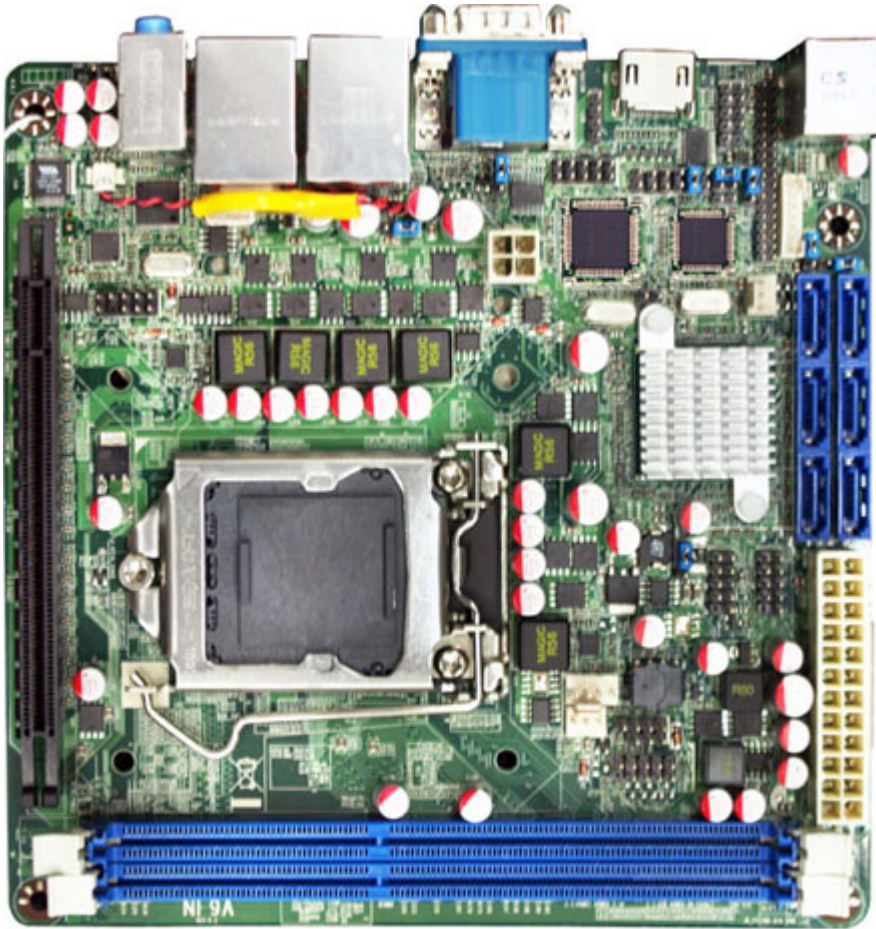

Support:  [Specifications \[EN\]](#)

- Intel® Q67 Express Chipset
- Supports Intel LGA 1155 Socket Core™ i3, i5, i7 & Pentium Processors
- 2 * Dual Channel DDR3-1333/1066 up to 16GB
- Intel 82579LM & 82574L Gigabit LAN
- Intel Active Management Technology (iAMT 7.0)
- PCI Express x16 Slot
- Integrated 24-bit Dual Channel LVDS
- 4-port SATAII 3Gb/s & 2-port SATA III 6Gb/s with RAID 0, 1, 5, 10 & JBOD Support
- HDMI, and VGA Video Outputs
- Built-in Watchdog Timer Technology
- Mini-ITX Form Factor (170mm x 170mm)

• **CPU**

• **Chipset**

• **Memory**

• **Expansion Slots**

• **Storage**

INTEL® LGA 1155 Socket Core i7/i5/i3/Pentium Processor

INTEL® Q67 Chipset

Clock 100MHz

2 * 240 pin 4GB 1333/1066 Dual CH DDR3 SDRAM DIMM Max. up to 16GB

1 *PCIe x 16

2 * Serial ATA3 6Gb/s & 4 * Serial ATA2 3Gb/s connectors support RAID 0, 1, 5, 10

• Audio	VIA VT1705 6-Channel HD Audio CODEC
• Ethernet LAN	Intel 82579LM & 82574L PCI-E Gigabit Ethernet LAN
• LVDS	Onboard 24-bit dual channel LVDS connector
• USB	Embedded 10 * USB 2.0/1.1
• Special Features	Support ACPI S3 Support CPU Smart FAN Support Watch Dog
• Rear Panel I / O	6 * USB 2.0/1.1 ports 1 * PS2/KB Connector 2 * RJ-45 port 1 * HDMI port 1 * COM port 1 * VGA port 3 * Audio Phone Jack
• Internal I / O	2 * USB 2.0/1.1 headers for 4 USB 2.0 ports CPU /NB / Chassis Fan connectors 1 * GPIO header 1 * COM header(RS232/422/485) 1 * IR header 1 * Chassis Intrusion header 1 * AUDIO header 1 * 24-pin & 4-pin 12V ATX Power connector
• BIOS	AMI EFI 64MB SMT Flash ROM
• Form Factor	Mini-ITX Form Factor (170mm x 170mm)
• Functional	ATM, Automation, medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation
• Certificate	CE, FCC, RoHS
• Temperature	Operating within 0~60 centigrade Storage within -20-85 centigrade

Product Accessories

- COM cable
- Manual
- CD
- 2x SATA cable
- I/O shield